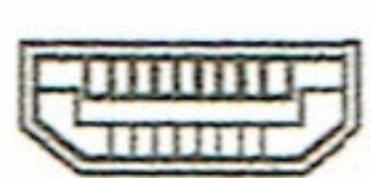
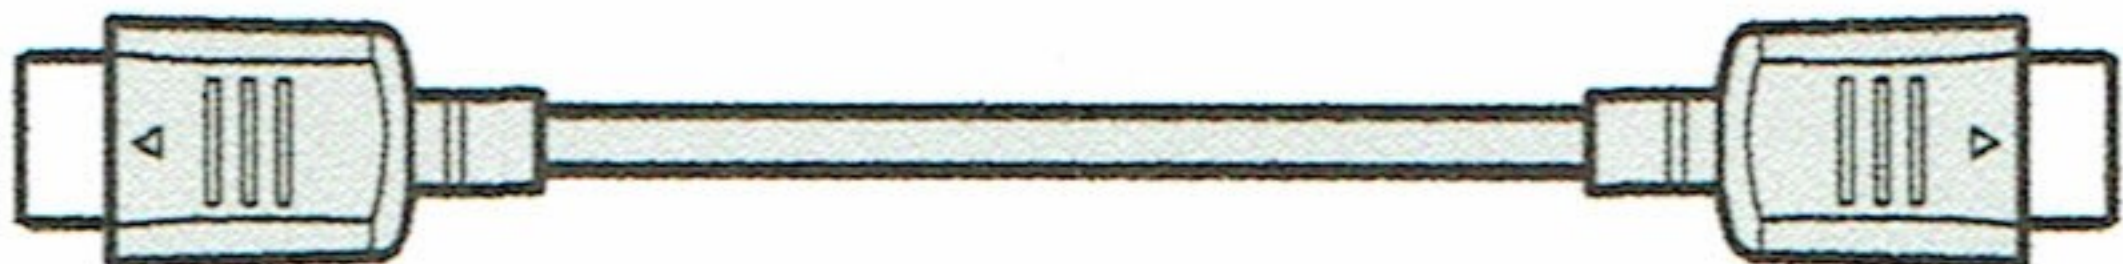
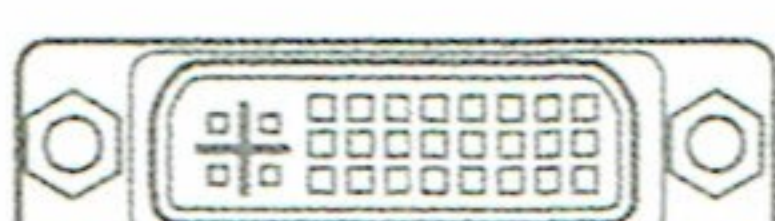
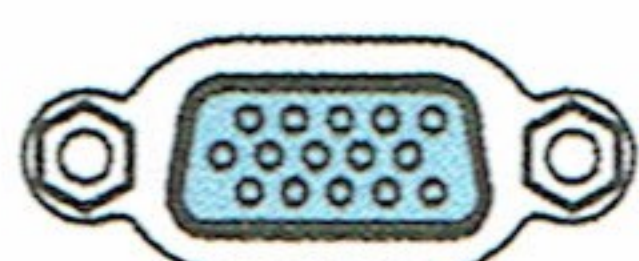
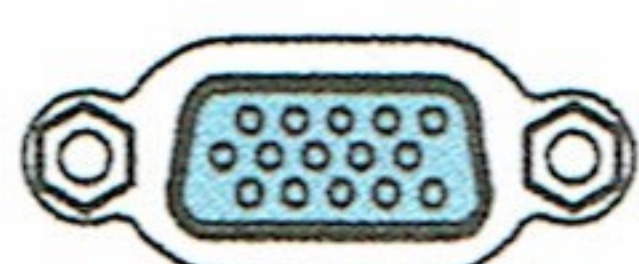
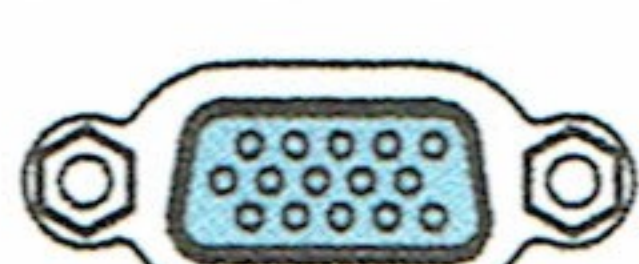
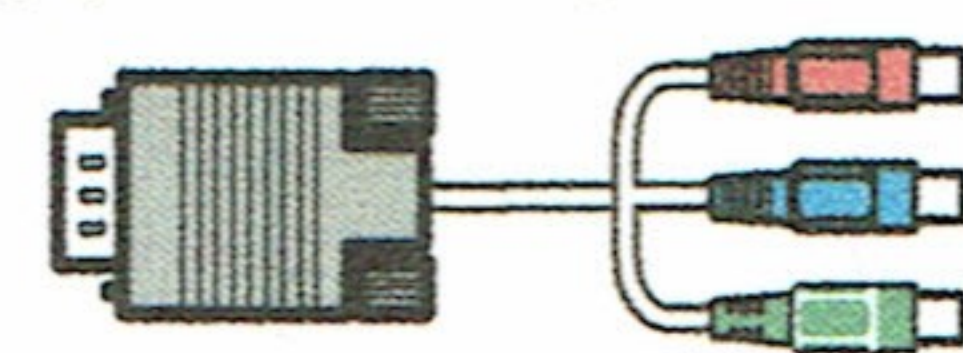
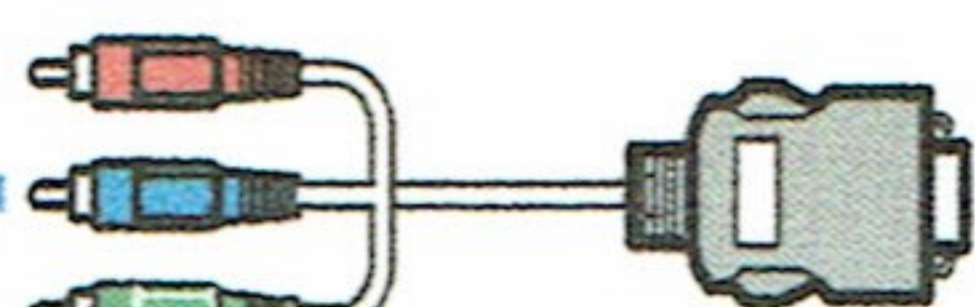
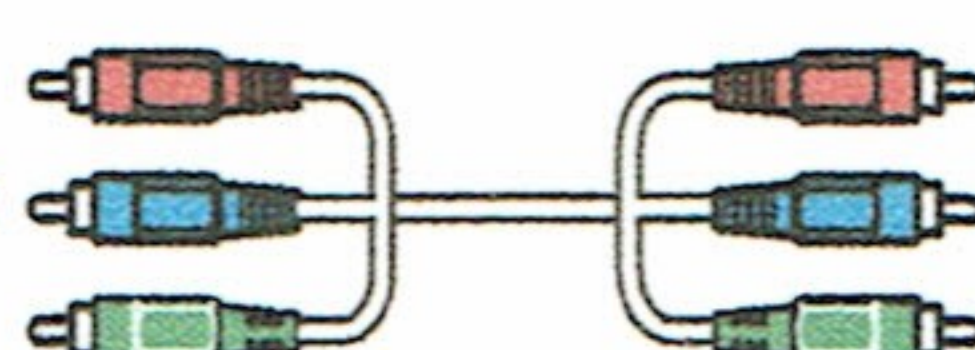
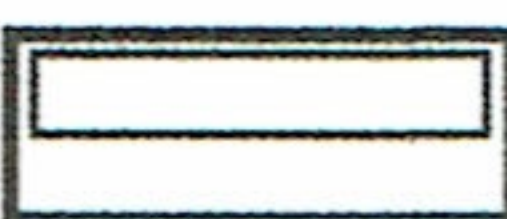


SELECTING AN INPUT SIGNAL (INPUT)

Select an appropriate input signal in the [INPUT] menu if you want to project a digital PC or AV equipment signal or you connect multiple computers or AV equipment to receive their input signals. Skip this step if you have not changed the input signal since the last projection.

■Types of Input Signals

The table below shows the relationship among input signals supported by the projector, input terminals and connection cables.

Input signal	Supported model	Input terminal	Types of connection cables
HDMI	SX80 II	HDMI IN 	HDMI cable (commercial item) 
DIGITAL PC	SX80 II	ANALOG PC-1/ DVI-I IN 	DVI digital cable (LV-CA29, option) 
ANALOG PC-1	SX80 II	ANALOG PC-1/ DVI-I IN 	Computer connection cable (supplied item) 
	SX800	ANALOG PC-1 	VGA cable (supplied item) 
ANALOG PC-2	SX80 II SX800	ANALOG PC-2/ COMPONENT IN 	VGA cable (commercial item) 
COMPONENT	SX80 II SX800	ANALOG PC-2/ COMPONENT IN 	Component cable (supplied item)  Commercial component adapter cable with D terminal – RCA plugs  Commercial component cable with RCA – RCA plugs 
VIDEO	SX80 II SX800	VIDEO IN 	Video cable (commercial item) 
S-VIDEO	SX80 II	S-VIDEO IN 	S-VIDEO cable (commercial item) 
USB	SX80 II	USB 	USB cable or USB flash memory (commercial item)